


# Assembly Instructions

## Jorgenson Cube Locker

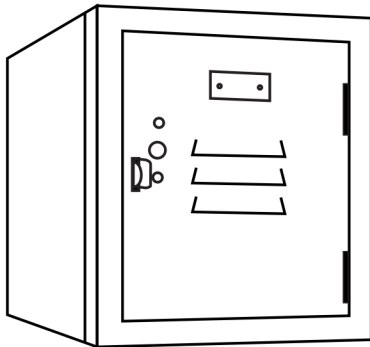

### Assembly of Cube Locker

All bolts are to be inserted on outside of locker while all nuts are to be placed on the inside of the locker. Each Locker is assembled as a stand-alone unit. Individual units can be joined together for placement in a row.

#### Step One:

Remove unassembled locker from shipping packing and identify all parts as shown below.

(1) Front Door & Frame





(2) Top/Bottom Panels

Top/Bottom are identical for convenience

(2) Side Panels

Side Panels are identical for convenience


(1) Back Panel

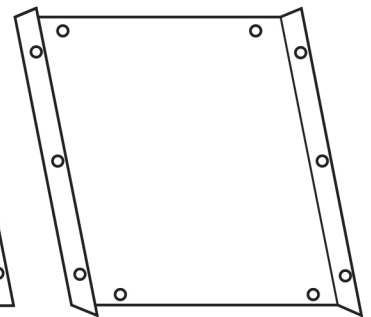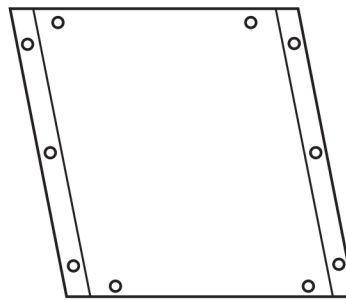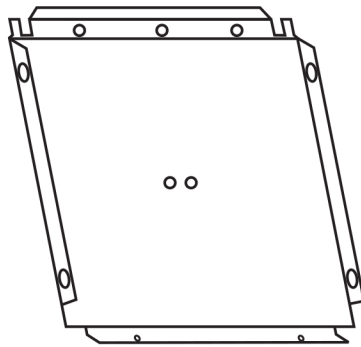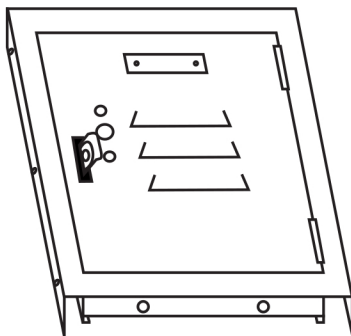

#### Step Two:

- Place back panel on flat even floor or pair of saw horses.
- Bolt left and right side panels to the inside of the back panel flange.

**View of locker  
with back on floor  
or saw horses.**

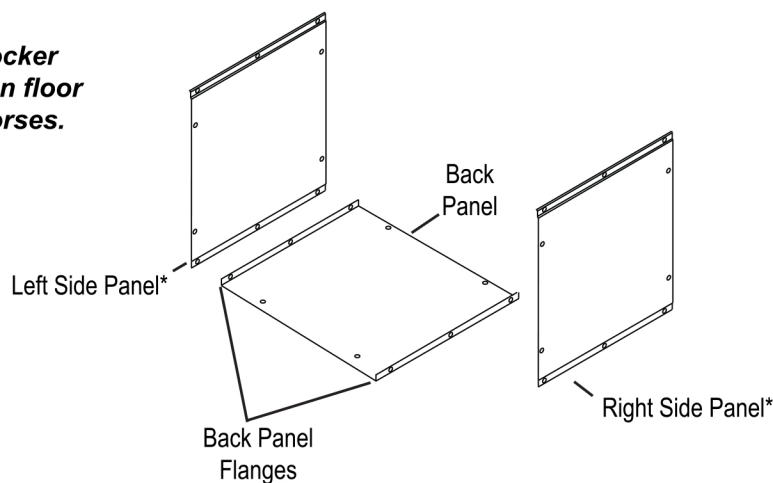


# Assembly Instructions

## Jorgenson Cube Locker

### Step Three

- Bolt bottom panel inside both side panels and back panel.
- Bolt top panel outside both side panels and back panel
- \* Note: Both bottom and top panels are identical.

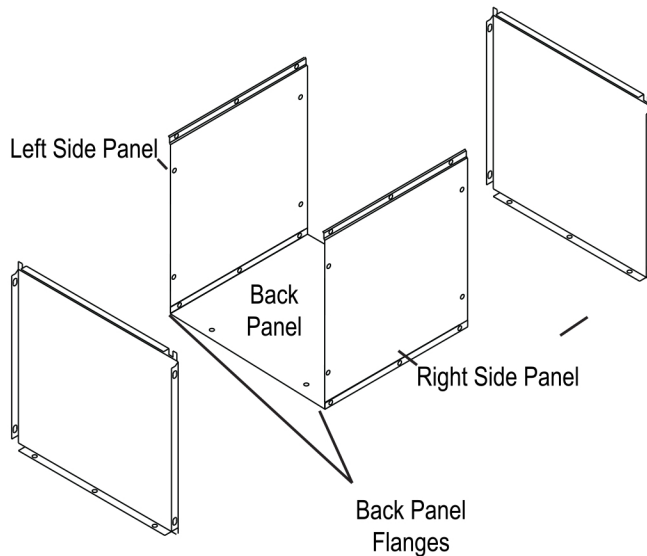

### Step Three

- Bolt front door frame on the outside the left, right, top and bottom flanges.
- Tighten all bolts
- Bolt number plates on door if included and not secured.
- \* In the interest of safety, we highly recommend anchoring lockers to prevent injury or theft.

